



APPROVAL SPECIFICATION

PLEASE APPROVE & RETURN BEFORE 2022/11/,
OR WE WOULD REGARD IT HAS BEEN CONFIRMED.

Customer: _____

Product Name: NetAgent9 Mini Go-S USB /簡易版/內接式/LF

Part No.: 0DS807-01g-LF

Model: Standard

Rev.: V1.0

Date: 2022-11-

	APPROVED	CHECKED	ISSUED
NAME			<i>Richard Luy</i>

廣州鼎堅資訊科技有限公司
MEGA SYSTEM TECHNOLOGIES INC.
廣州市天河區車陂路黃洲工業區 8 棟 1 樓東
電話:020-38602476 傳真: 020-38628922
<http://www.megatec.com.tw>
e-mail:sales@megatec.com.tw



Contents

1. General Specification
2. Power Specification
3. Pin Assignment
4. Signal Specification
5. Environment Specification
6. Dimension and Outlook
7. Packing

1. General Specification

CPU	ARM 300MHz 32Bit
System Clock	300MHz
Flash Memory	128M Byte
SDRAM	64M Byte
LED	5
Watch Dog	Yes
USB Port	1
Modem Port	No
Environment Port	No
Real Time Clock	No
LCD Display	No
LAN Interface	10M/100M UTP
Ethernet Throughput	1620K Byte per seconds
Ethernet Latency	0.759 milliseconds

2. Power Specification

NetAgent9

ITEM	Minimum	Maximum
DC Input Voltage	+5V	+15V
DC Input Current		6W Maximum

3. Pin Assignment

Pin	Input/Output	Description
P1 GND	GND	Ground PIN
P2 PowerIn	Input	DC power input.
P3 RS232_TXD	Output	+5.5V and -5.5V Voltage level for RS232
P4 RS232_RXD	Input	-3V to -15V for logic '1', +3V to +15V for logic '0'
P5-P7No USE		
P8 SNMPSIG		NetAgent card plug in detect, connect to PIN 10
P9 GND	GND	Ground PIN
P10 SNMPSIG		NetAgent card plug in detect, connect to PIN 8
P11-P26 No Use		

4. Signal Specification

Receiver Inputs

PARAMETER	CONDITIONS	MIN	TYP	MAX
Input Voltage Range		-25V		+25 V
Input Threshold Low	TA = +25°C	+0.6V	+1.2V	
Input Threshold High	TA = +25°C		+1.5V	+2.4V
Input Hysteresis			0.3 V	
Input Resistance	TA = +25°C	3 k ohm	5 k ohm	7k ohm

Transmitter Outputs

PARAMETER	CONDITIONS	MIN	TYP	MAX
Output Voltage Swing	All transmitter outputs loaded with 3k ohm to ground	±5.0V	±5.4V	
Output Resistance	TA = +25°C	300	10M	
Output Short-Circuit Current			±35 mA	±60 mA

USB Port

Parameter	Description
Output Power	Maximum 500mA
USB Function	Universal Serial Bus Specification Rev. 2.0
Data Transfer	Supports data transfer at High-speed(480Mbit/sec), Full-speed(12Mbit/sec) and Low-speed (1.5Mbit/s)

5. Environment Specification

PARAMETER	CONDITIONS	Minimum	Maximum
Operating Temperature		0 °C	60 °C
Storage Temperature		-40 °C	85 °C
Operating Humidity	Non-Condensing	10% RH	90% RH
Storage Humidity	Non-Condensing	5% RH	95% RH


EMI
FCC Class B, CE

6. Dimension and Outlook

The whole package includes the following items.

A. NetAgent9 Module

Dimension	67.8mm(L) x 68.4mm(W) x 29.1mm(H)
Weight	50.4g±2g

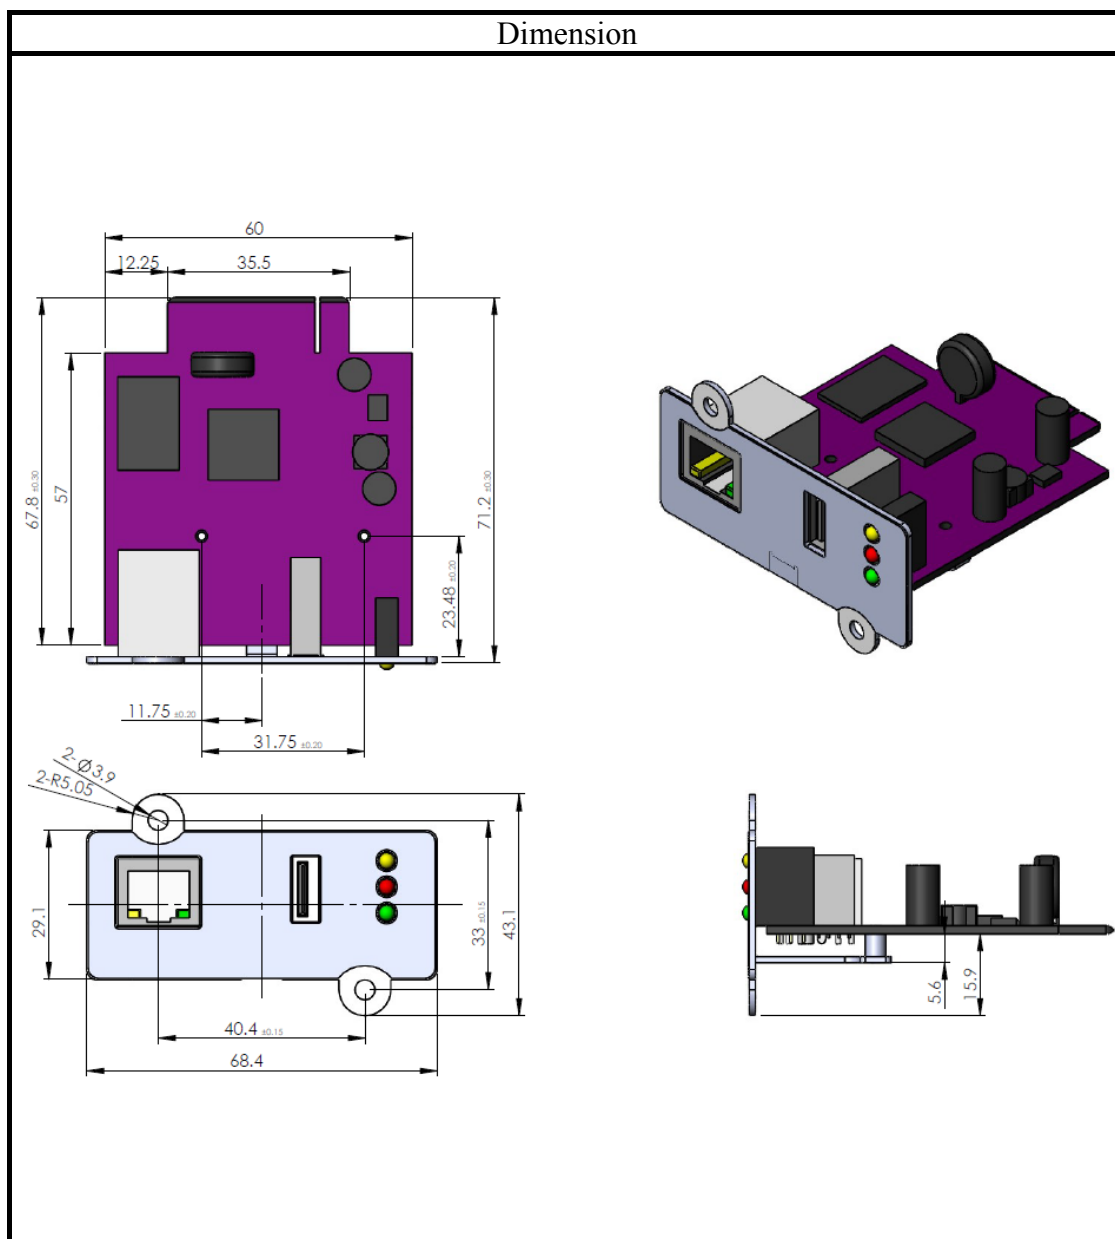

Outlook

Top view





Mega System Technologies, Inc.

Bottom view



B. Shielding Bag

Dimension	200mm(L) x 110mm(W)
Weight	3.5g±0.5g



C. Desiccant

Dimension	48mm(L) x 39mm(W)
Weight	2.1g±0.5g



7. Packing

Internal packaging


Dimension	67.8mm(L) x 68.4mm(W) x 29.1mm(H)
Weight	56g±5g
Envelope	In a plastic bag, 20cm(L) x 11cm(W)





The Packing is using a cardboard box.

Dimension	43cm(L) x 39cm(W) x 9cm(H)
Quantity	50sets
Total Weight	3440g±200g

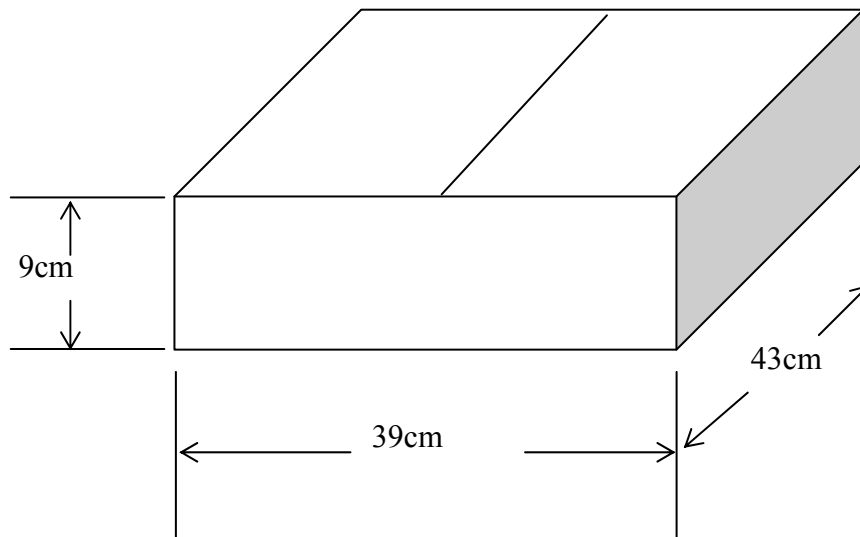

* For 50pcs DS807

